

ECOTHERM

WATER HEATER CO.

PROFESSIONAL WATER HEATING SOLUTIONS

*FREE INSTALLATION AND DELIVERY.
GUARANTEED SUPPORT AND AFTER-SALES SERVICE

**FREE Installation!!
Within Metro Manila**

**PROMO
OFFER**

Singlepoint Model

Ferrol-Rita 4.5kw	3,995.00
Sun Model 3.5kw	4,500.00
Elite Pro 3.5kw	4,750.00
Celsius 516 3.5kw	5,195.00
Titanium Model 3.5kw	5,195.00
Sun copper 3.5kw	5,950.00
Titanium copper 3.5kw	6,450.00
Celsius 516copper 3.5kw	6,450.00
Innov Pro 3.5kw	6,500.00
Innov Pro copper 3.5kw	6,950.00

FOR INQUIRIES:

Raquel / Shell

Direct Line: 8423.4383/ 8696.0559
7577.4659

Sun	0922.8955.988
Globe	0917.5838.576
	0917.5994.976
Smart	0939.924.9809

Email add:

raquel.garcia@ecothermwaterheater.com



*Metro Manila, Tagaytay City, Baguio City, Cebu City, Davao City only.

SINGLEPOINT

Innov PRO SP



- Fully Automatic
- Digital Temperature Display
- Dual function thermostat
- Step-less power regulator
- With ELCB
- Flow Switch Safety Device

HEATING CAPACITY: 3.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 220mm x 90mm x 330mm (W x D x H)

Ferroli RITA



- Fully Automatic
- Dual function thermostat
- Flow Switch Safety Device
- With Flow Control Valve
- With ELCB
- Compact Design

HEATING CAPACITY: 4.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 280mm x 100mm x 180mm (W x D x H)

Celsius 516 MP



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- Flow Switch Safety Device
- Copper Chamber
- With ELCB
- Slim Design

HEATING CAPACITY: 3.5kW / 5.5kW / 6.0kW
VOLTAGE: 220V / 60Hz
DIMENSION: 219mm x 87mm x 330mm (W x D x H)

Titanium 232 MP



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- Copper Chamber
- With ELCB
- Flow Switch Safety Device
- Compact Design

HEATING CAPACITY: 3.5kW / 5.5kW / 6.0kW
VOLTAGE: 220V / 60Hz
DIMENSION: 307mm x 95mm x 195mm (W x D x H)

Elite PRO



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- With Flow Control Valve
- With ELCB
- Flow Switch Safety Device
- Compact Design

HEATING CAPACITY: 3.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 320mm x 95mm x 210mm (W x D x H)

Sun 149 SP



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- With Flow Control Valve
- Flow Switch Safety Device
- With ELCB
- Slim Design

HEATING CAPACITY: 3.5 kW / 4.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 190mm x 88mm x 308mm (W x D x H)

Innov PRO MP



- Fully Automatic
- Digital Temperature Display
- Dual function thermostat
- Step-less power regulator
- Copper Chamber
- With ELCB
- Flow Switch Safety Device

HEATING CAPACITY: 3.5kW / 5.5kW / 6.0 kW
VOLTAGE: 220V / 60Hz
DIMENSION: 220mm x 90mm x 330mm (W x D x H)

Atmor InLine 800 MP



- Water splash proof IP24
- Built-in ELCB surge protector
- Water flow sensor
- Dual function thermostat
- Nylon chamber

HEATING CAPACITY: 3.5kW / 5.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 304mm x 98mm x 178mm (W x D x H)

Celsius 516 SP



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- Flow Switch Safety Device
- With ELCB
- Slim Design

HEATING CAPACITY: 3.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 219mm x 87mm x 330mm (W x D x H)

Titanium 232 SP



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- Flow Switch Safety Device
- With ELCB
- Compact Design

HEATING CAPACITY: 3.5kW
VOLTAGE: 220V / 60Hz
DIMENSION: 307mm x 95mm x 195mm (W x D x H)

Sun 149 MP



- Fully Automatic
- Dual function thermostat
- Step-less power regulator
- Flow Switch Safety Device
- Copper Chamber
- With ELCB
- Slim Design

HEATING CAPACITY: 3.5kW / 5.5kW / 6.0kW
VOLTAGE: 220V / 60Hz
DIMENSION: 190mm x 88mm x 308mm (W x D x H)

FIND US:

MANILA
85-A, C. Benitez St., Barangay Kaunlaran Cubao, Quezon City

TAGAYTAY
Tagaytay-Sta. Rosa Road, Barangay San Francisco, Tagaytay City

BAGUIO
2nd Floor, #18 Legarda Road, Baguio City



CEBU
102 NDI Commercial Complex, A.S Fortuna St., Mandaue City, Cebu

DAVAO
Door #1, Greenfern Building., El Rio Vista, Bacaca Road Davao City



www.ecothermwaterheater.com
www.facebook.com/ecothermwaterheaterco

*Standard fitting includes flexible hoses, nipples and elbow pipes required during installation. **Telokayer is for Singlepoint units only. Free multipoint standard fittings for all Multipoint units.

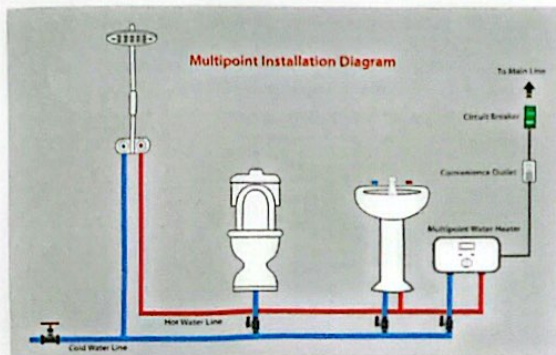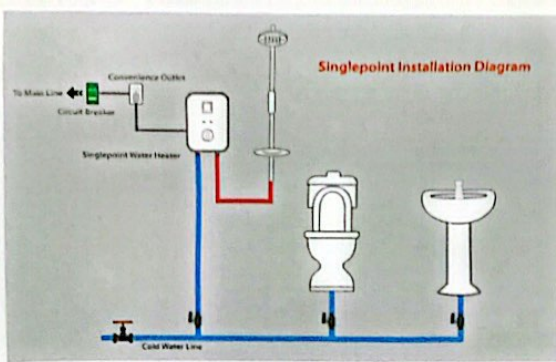

We are trusted by property developers:



We are also trusted by commercial establishments:



Storage Water Heater



GENERAL FEATURES:

- Blue diamond glass lined for inner tank
- Convex endcap designed for higher pressure
- Magnesium anode for water purification
- CFC free polyurethane insulation
- Corrosion resistant
- Double safety protection
- Equipped with TPRV (Temp. & Pressure Relief Valve)
- User friendly and less maintenance
- Floor standing type

SPECIFICATIONS:

	RHEEM					ECOTHERM				
Model	80VPS	80VPS2	80VPS3	80VPS4	ECO-96	ECO-190	ECO-240	ECO-300	ECO-400	ECO-5-58
Size (mm)										
height (A)	460	554	764	973	452	694	901	885	1229	1809
diameter (B)	377	461	461	461	415	415	515	465	465	635
Capacity (Gals)	6	15	20	30	9	15	24	30	40	58
Capacity (L)	25	50	75	100	33	50	90	100	140	270
Voltage	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240	220-240
Kilowatt	3.0	3.0	3.0	3.0	3.6	3.6	3.6	4.8	4.8	4.8
Cycle (Hz)	60	60	60	60	60	60	60	60	60	60
Phase	1 Ph	1 Ph	1 Ph	1 Ph	1 Ph	1 Ph	1 Ph	1 Ph	1 Ph	1 Ph
Inlet / Outlet Size	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4	3/4
Approx. Heat Up Time to 60°C (min/less)	20	40	60	80	20	30	60	60	70	100

Swimming Pool Heaters / Heat Pump



GENERAL FEATURES:

- Highly efficient heat exchanger and water pump
- Low maintenance cost
- Compact design for easy installation
- Defrosting with revert circuit
- Quiet Fans, Low Noise
- Thermal insulation on all pipes for minimal heat loss
- No screw design, Anti corrosion case
- Indoor Wire Controller

SPECIFICATIONS:

Model	ECO-HWHV2-T1	ECO-HWHV2-18	ECO-HWHV3-58
Power Supply (V/ph/Hz)	220-240 / 1 / 60	220-240 / 1 / 60	380-415 / 3 / 60
Rated Power Input (kW)	2.7	4.2	8.9
Heating Capacity (kW)	11.2	18	50
Maximum Input Current (A)	30	35	23.5
Fan Motor Quantity (pc.)	1	1	2
Level Against Electric Shock	1	1	1
Water Proof Grade	IPX4	IPX4	IPX4
COP	4	4	5
Noise dB(A)	55	60	65
Refrigerant	R410A	R410A	R410A
Pipe Size (mm) (inside)	Dn25	Dn25	Dn25
Net Weight (kg)	90	160	250
Net Size (mm)	650x650x860	752x691x1055	1410x755x1050
Test Condition	Rated Working Condition: Dry Bulb Temp: 20°C, Wet Bulb Temp: 15°C, Cool Water Temp: 15°C, Hot Water Temp: 35°C		



ISO-9001



All product names, logos, and brands are property of their respective owners. All company, product and service names used in this brochure are for identification purposes only.